

CATÁLOGO **Mangueiras**



CATÁLOGO MANGUERAS




75NST



SJ50NST



SJ50ULNST

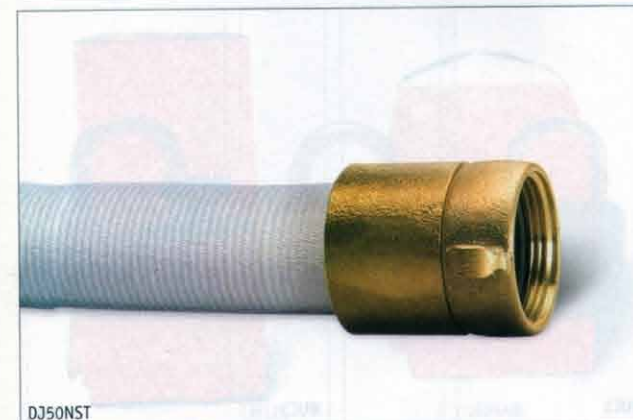

DJ50NST

FIRE HOSE

RACK AND REEL FIRE HOSE is fully lined, FM approved and has an acceptance test pressure of 500 psi and a service test of 250 psi. Each section comes folded for ease of installation on pin racks.

NOTE: This inexpensive lightweight hose is designed for use as emergency fire hose only! **Not intended for wash down or any other purpose.**

P/N	DESCRIPTION	BOWL WEIGHT	
		SIZE	COUPLED
50NST or NPSH	50' x 1 1/2" Brass	1 13/16"	7 lb
75NST or NPSH	75' x 1 1/2" Brass	1 13/16"	9 lb
100NST or NPSH	100' x 1 1/2" Brass	1 13/16"	12 lb

SINGLE JACKET FIRE HOSE has a burst pressure of 750 psi, an acceptance test pressure of 500 psi, a service test of 250 psi and is FM approved. Made of 100% polyester, rubber-lined material for strength and flexibility. Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL WEIGHT	
		SIZE	COUPLED
SJ50NST or NPSH	50' x 1 1/2" Brass	1 13/16"	15 lb
SJ50ANST	50' x 1 1/2" Alum	1 13/16"	13 lb
SJ75NST or NPSH	75' x 1 1/2" Brass	1 13/16"	20 lb
SJ75ANST	75' x 1 1/2" Alum	1 13/16"	18 lb
SJ100NST or NPSH	100' x 1 1/2" Brass	1 13/16"	27 lb
SJ100ANST	100' x 1 1/2" Alum	1 13/16"	25 lb
SJ2550NST or NPSH	50' x 2 1/2" Brass	2 13/16"	27 lb
SJ2550ANST	50' x 2 1/2" Alum	2 13/16"	25 lb
SJ25100NST	100' x 2 1/2" Brass	2 13/16"	51 lb



More SINGLE JACKET FIRE HOSE Available - Call for Pricing.

UL LABELED SINGLE JACKET FIRE HOSE has a burst pressure of 750 psi, an acceptance test pressure of 500 psi and a service test of 250 psi. Made of 100% polyester, rubber-lined material for strength and flexibility. Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL WEIGHT	
		SIZE	COUPLED
SJ50ULNST	50' x 1 1/2" Brass	1 13/16"	15 lb
SJ75ULNST	75' x 1 1/2" Brass	1 13/16"	20 lb
SJ100ULNST	100' x 1 1/2" Brass	1 13/16"	27 lb
SJ2550ULNST	50' x 2 1/2" Brass	2 13/16"	27 lb



More UL LABELED SINGLE JACKET FIRE HOSE Available - Call for Pricing.

DOUBLE JACKET FIRE HOSE has a burst pressure of 1,200 psi, an acceptance test pressure of 800 psi and a service test of 400 psi. Meets NFPA 1962. Made of 100% polyester, rubber-lined material for strength and flexibility. Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL WEIGHT	
		SIZE	COUPLED
DJ50NST or NPSH	50' x 1 1/2" Brass	1 13/16"	20 lb
DJ50ANST	50' x 1 1/2" Alum	1 13/16"	18 lb
DJ100NST	100' x 1 1/2" Brass	1 13/16"	35 lb
DJ100ANST	100' x 1 1/2" Alum	1 13/16"	32 lb
DJ2550NST	50' x 2 1/2" Brass	3"	37 lb
DJ2550ANST	50' x 2 1/2" Alum	3"	34 lb



More DOUBLE JACKET FIRE HOSE Available - Call for Pricing.

CATÁLOGO MANGUERAS

YELLOW HYPALON FIRE HOSE has the same specifications as our standard double jacket hose except that the outside jacket is independently and completely impregnated with an abrasion resistant, water repellent polymer. Available in aluminum couplings only. Recommended for industrial fire protection.

P/N	DESCRIPTION	BOWL	WEIGHT
		SIZE	COUPLED
DJ50YHANST	50' x 1 1/2"	1 13/16"	21 lb
DJ17550YHANST	50' x 1 1/2"	2 1/8"	25 lb
DJ2550YHANST	50' x 2 1/2"	3"	39 lb

→ **More YELLOW HYPALON FIRE HOSE Available - Call for Pricing.**



DJ50YHANST

RUBBER COVERED FIRE HOSE has a burst pressure of 800 psi, an acceptance test pressure of 500 psi and a service test of 250 psi. Abrasion and heat-resistant nitrile, synthetic, one-piece cover and liner is impervious to water, oil, gas and most chemicals. Lightweight and virtually kink resistant for ease of handling. No drying required! Tested and coupled to NFPA 1961 standard. FM approved. Available with aluminum couplings only.

P/N	DESCRIPTION	BOWL	WEIGHT
		SIZE	COUPLED
RCH50ANST	50' x 1 1/2"	1 11/16"	11 1/2 lb
RCH100ANST	100' x 1 1/2"	1 11/16"	22 lb
RCH250ANST	50' x 2 1/2"	2 3/4"	24 lb

→ **More RUBBER COVERED FIRE HOSE Available - Call for Pricing.**



RCH50ANST

FIRE HOSE COUPLINGS, RINGS & GASKETS

DOUBLE JACKET COUPLINGS, RINGS & GASKETS.

P/N	DESCRIPTION	BOWL
		SIZE
DJCNSTD	1 1/2" NST Brass DJ	1 13/16"
DJCNPSHD	1 1/2" NPSH Brass DJ	1 13/16"
ADJCNSTD	1 1/2" NST Alum DJ	1 13/16"
DJC25NSTD	2 1/2" NST Brass DJ	3"
ADJC25NSTD	2 1/2" NST Alum DJ	3"
DJTG15	DJ Tail Gasket	1 13/16"
DJTG25	DJ Tail Gasket	3"
SER15	1 1/2" x 1 1/4" SJ/DJ Expansion Ring	
DER25	2 1/2" x 1 1/2" DJ Expansion Ring	
SJSG15	1 1/2" Swivel Gasket, F End Only	
SJSG25	2 1/2" Swivel Gasket, F End Only	



DJCNSTD



DER25